





SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)

Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

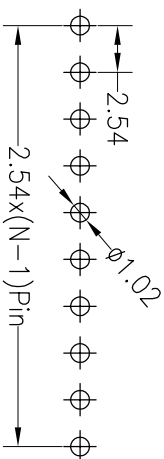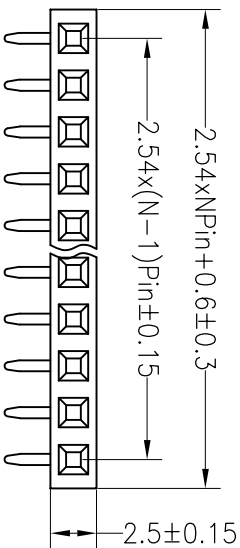

Ordering Information

2271 01 XX X N XX R U X 01

- No. of Pins Per Row 1*40
- Insulator Material Option:
 - A=BK-PBT
 - C=BK-PA6T
 - D=BK-PA46
 - E=BK-PA9T
 - F=BK-LCP
- Contact Plating:
 - G1:Gold Flash
 - G2:1.5U" Gold
 - G3:2U" Gold
 - G4:3U" Gold
 - G5:5U" Gold
 - SO:Gold Flash/Tin
 - SN:Tin
- Packing:
 - O=PE Bag
 - A=Troy
 - T=Tube
 - P=Tube+Cap
 - R=Reel+Cap
 - M=Reel+Mylar

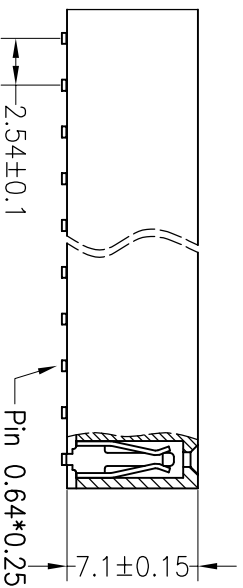

OPERATION		DRAW		SCALE		FIT	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	UNIT	SIZE
A0	2012.04.18	NEW DRAWING		X.XX	±0.30	mm	A4
				X.XX	±0.20		
				X.XXX	±0.10		
				Angle	±3°		

YYS	Sheng	12.04.18					
APPROVE							
PROJ.							

227101XXXXXXRUX01	2.54PF H:7.1mm 1xNpin 90°
-------------------	---------------------------

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992