

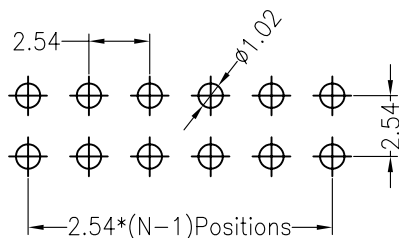



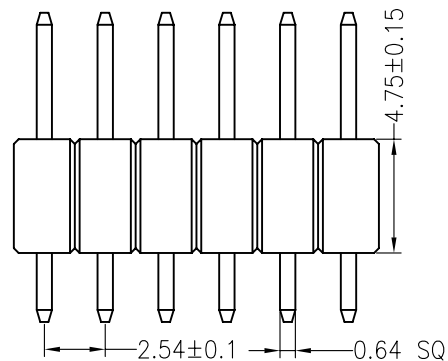

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: LCP
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

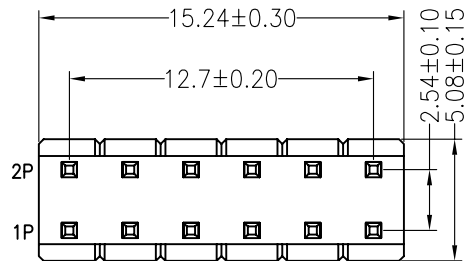

Ordering Information

1247 12 XX X N XX S XXX X 0X

- | | | | | |
|--------------------|---------------------------|-----------------------|------------|--------------|
| No.of Pins Per Row | Insulator Material Option | Contact Plating | Pin Length | Packing |
| 1x40 | A=BK-PBT | G0:Gold Flash | | O=PE Bag |
| 2x40 | B=BK-PA66 | G1:1U" Gold | | A=Tray |
| 3x40 | C=BK-PA6T | G2:1.5U" Gold | | T=Tube |
| 1---40 | D=BK-PA46 | G3:2U" Gold | | P=Tube+Cap |
| 2---80 | E=BK-PA9T | G4:3U" Gold | | R=Reel+Cap |
| 3---120 | F=BK-LCP | S0:Gold Flash/Tin | | M=Reel+Mylar |
| | | S6:10u"Gold Flash/Tin | | |
| | | SN:Tin | | |

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list			
ITEM	PA	PC	L
Standard	3.50	3.50	11.80
Alternate			

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	JiLN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	124712XXXNXXSXXXX01
A0				2012.03.28	NEW DRAWING				SHEET	1/1	TITLE:	2.54PH H4.75mm Dual Row 180°
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE	PROJ.				