


HSE ROHS



Materials
 Pin:Brass (H59-3)
 Plating:Gold plated:1.25u"m/50u"nickel,full gold
 Insulator body(black):PPS/PBT(UL94V-0)

Electrical
 Current rating:2.0 Amps
 Contact resistance:20mΩ Max
 Insulation resistance:1000MΩ Min
 Operating voltage:60 AC/DC

Mechanical
 Operating temperature : -40°C to +105°C
 Soldering temperature:260°C,10s max

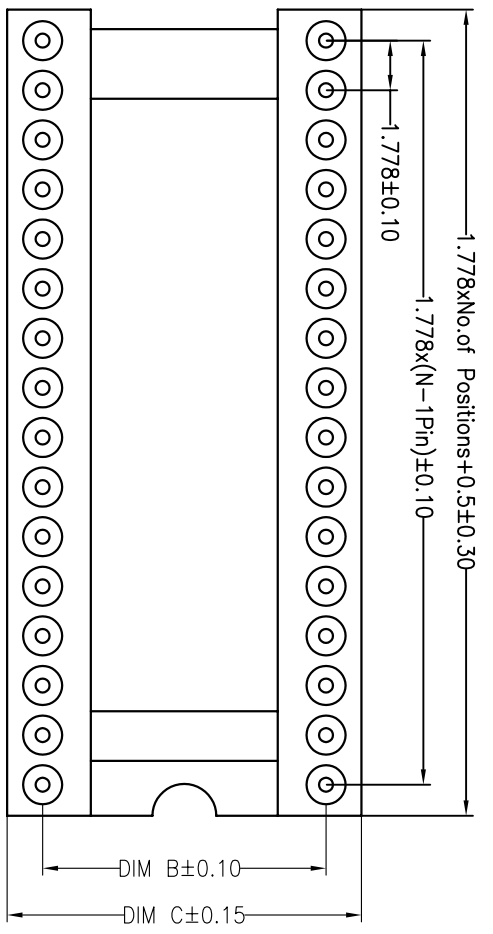

No. of Positions	B	C
16	7.62	10.16
24	10.16	12.7
28	10.16	12.7
30	10.16	12.7
32	10.16	12.7
48	10.16	12.7
20	15.24	17.64
24	15.24	17.64
28	15.24	17.64
40	15.24	17.64
42	15.24	17.64
48	15.24	17.64
52	15.24	17.64
56	15.24	17.64
64	15.24	17.64
68	15.24	17.64
64	19.05	21.45

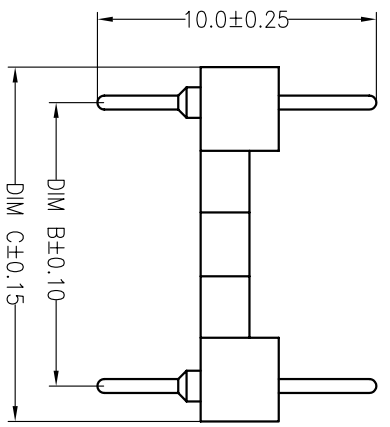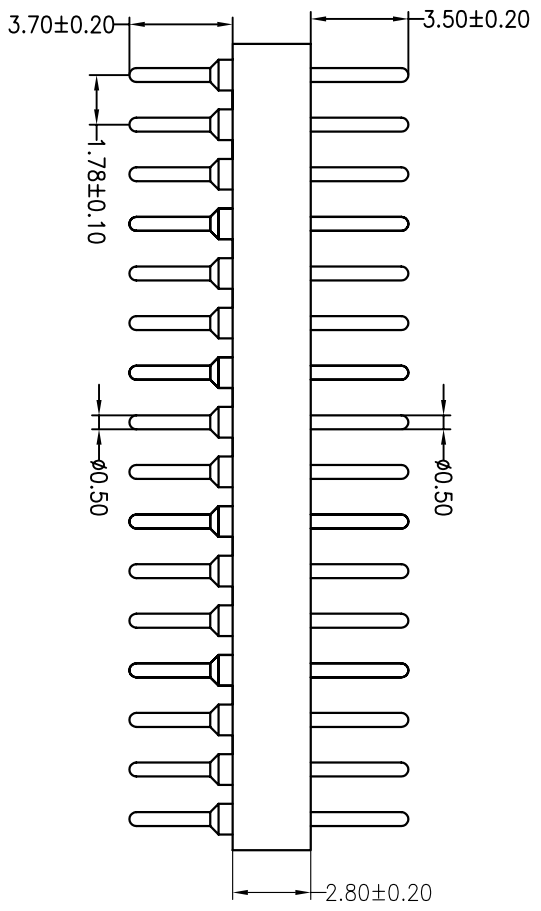

Ordering Information

3661 28 X XX S XX 100 X 1

Insulator Width No. of Pins
 N=7,62
 E=10,16
 W=15,24

Contact Plating
 SN:tin
 G0:sold
 G2:2U"Gold
 G3:3U"Gold
 G4:5U"Gold
 G5:10U"Gold
 S0:sold Flash/Tin
 Standard:50

Pin Length
 100=10.0mm

Packing
 O=Pe Bag
 T=Tube

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Y.YuSheng	12.07.24	UNIT	mm	A4	1/1	366128XXXXXX100X1	
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1		
X.XXX	±0.10	APPROVE		PROJ.		TITLE:			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	1.778X2.8 IC Socket 180° L=10.0mm			
A0	2012.07.24	NEW DRAWING							

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992