
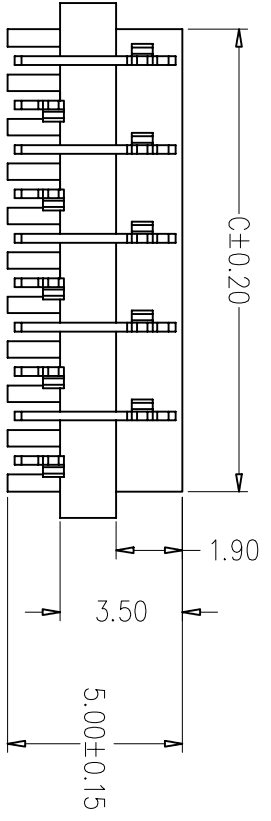
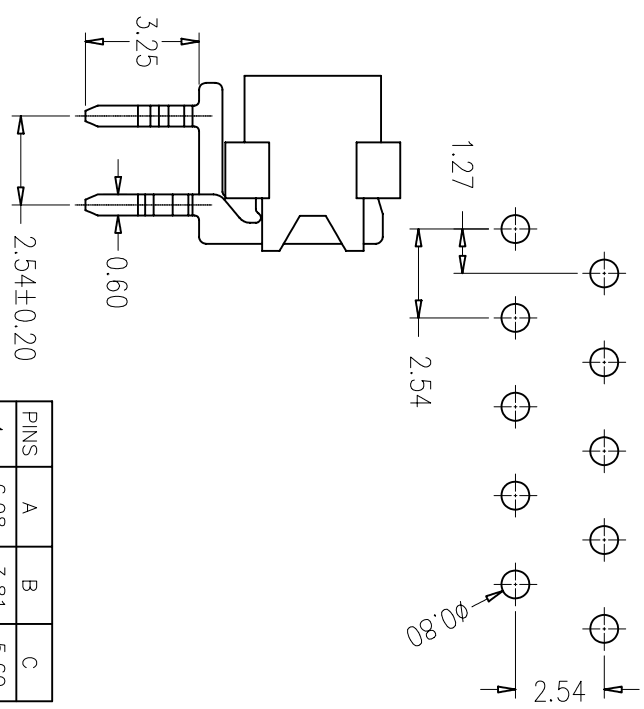


# HSE ROHS

## SPECIFICATIONS

Rated Current: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact Plating: Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

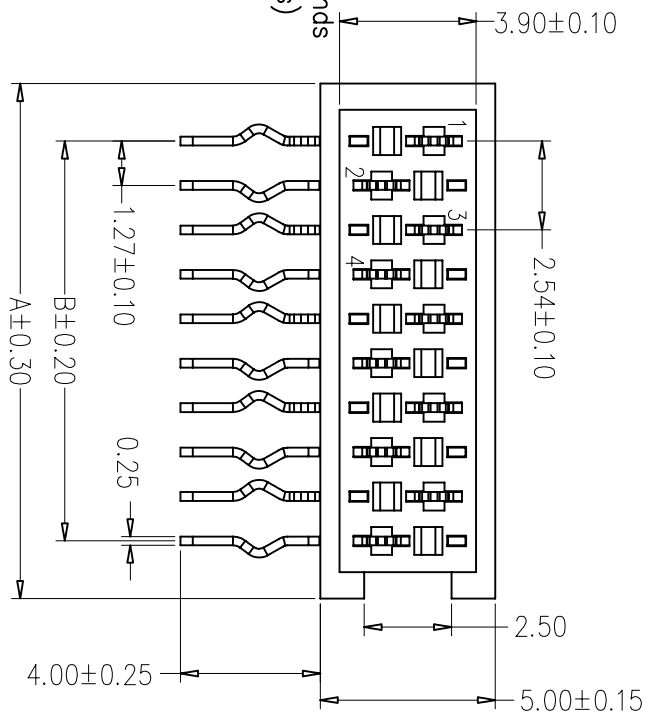

PINS	A	B	C
4	6.98	3.81	5.60
6	9.52	6.35	8.14
8	12.06	8.89	10.68
10	14.60	11.43	13.22
12	17.14	13.97	15.76
14	19.68	16.51	18.30
16	22.22	19.05	20.84
18	24.76	21.59	23.38
20	27.30	24.13	25.92
24	32.38	29.21	31.00
26	34.92	31.75	33.54

## Ordering Information

4000 XX F R SN XN T 01

No. of Pins: 04~26P  
 Contact Plating: SO:Gold Flash/Tin  
 Insulator Material: A=PBT, E=PA46  
 Pocking: T=Tube

OPERATION		DRAW		BEN		SCALE		FIT		PART NO.		
X.X	±0.30				12.04.11	UNIT	mm	A4	1/1	4000XXFRSNXNT01		
X.XX	±0.20	CHECK				SIZE	A4			深圳市锦凌电子有限公司		
X.XXX	±0.10	APPROVE				SHEET	1/1	TITLE:		SHENZHEN JINLING ELECTRONIC CO.,LTD		
Angle	±3°					PROJ.	PROJ.	MICRO MATCH FEMALE-90°DIP TYPE		Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992		
DIM	TOL											
DATE	MODIFICATION DESCRIPTION	CHANGE										
REV												
A0	2012.04.11	NEW DRAWING										
1												