


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

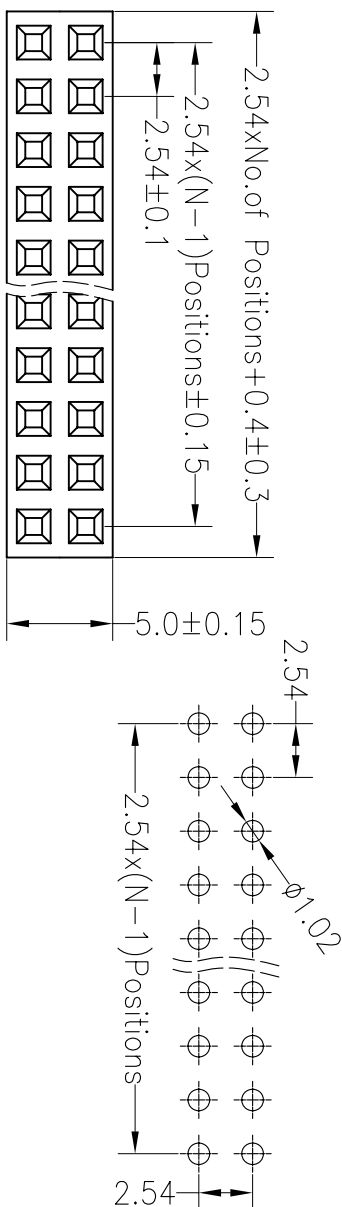

Ordering Information

2285D3 2 XX X N XX S Y X 01

- No. of Pins Per Row: 2*40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, G6:10U" Gold, G7:15U" Gold, SO:Gold Flash/Tin, SN:Tin
- Packing: O=PE Bag, A=Troy, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Wyar

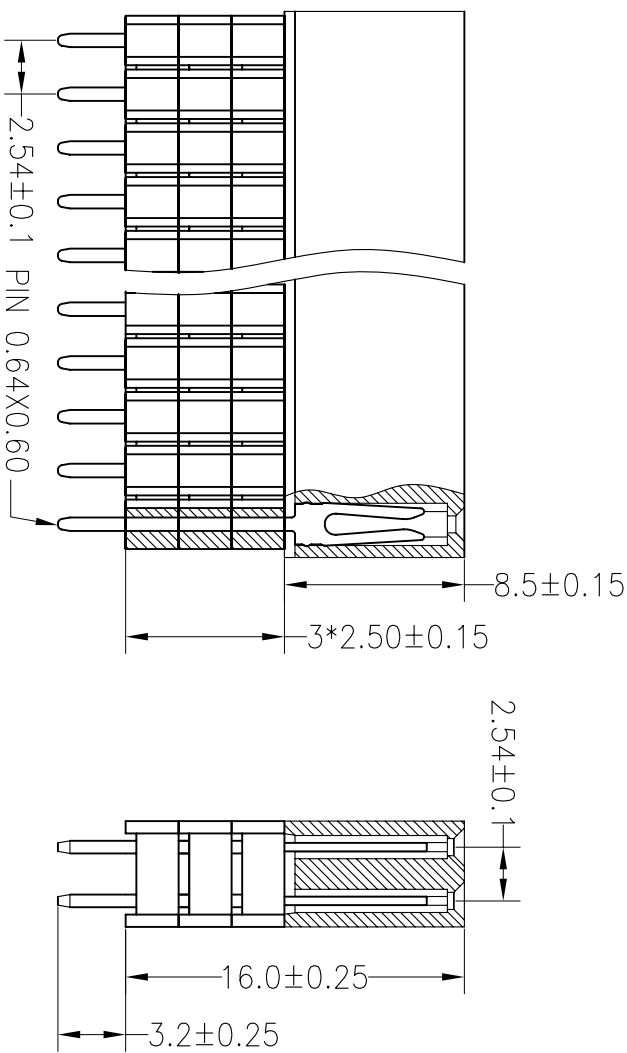

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	OurYanghui	17.08.17	SCALE	FIT	PART NO.	TITLE:
	1	2017.08.17	NEW DRAWING									
A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	X.XX	±0.20	CHECK	APPROVE	UNIT	mm	SIZE	A4
	1	2017.08.17	NEW DRAWING		X.XXX	±0.10			SHEET	1/1	SHEET	1/1
B	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°			PROJ.	◆		
C	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						
D	REV	DATE	MODIFICATION DESCRIPTION	CHANGE								
E	REV	DATE	MODIFICATION DESCRIPTION	CHANGE								
F	REV	DATE	MODIFICATION DESCRIPTION	CHANGE								
G	REV	DATE	MODIFICATION DESCRIPTION	CHANGE								

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992